
## OW51 Pixel Light

- Adopt integrated heat sink structural design, inner gluing, which speed up the process of heat dissipation, and ensure the luminous efficiency and lifetime.
- Apply 3-in-1 light source SMD5050, with even lighting output, unique anti-UV lampshade of PC and cover of stainless steel, all add up to the totally favorable optical effect.
- With powerful functions, and flexible control, resulting from the unique logarithmic dimming and optical mixing technique.
- Even light output, different CCT optional from single to RGB colors.







	System Power (W)		IP 65 Life Time 30,000hrs	Working Temp Working ← 95% Humidity ←	
Item NO.		Light Color	Input Voltage	Dimension(mm)	
OW514012	2.5	Single / RGB	DC 24V	L102xH34×W81	

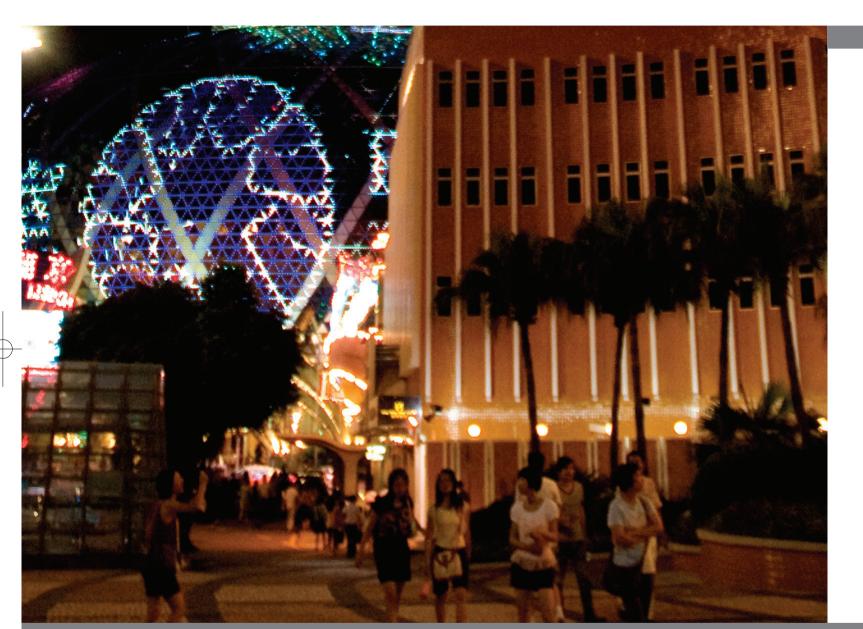

Ordering Information	C	)W51 4012	NO <u>40</u>	DG D24	2 <u>0</u> 2	
1 Color Temp	<b>30:</b> 304 <b>RR:</b> Red	15±175K <b>GG:</b> Green	<b>40:</b> 3985±2° <b>BB:</b> Blue	75K <b>5 YY:</b> Yellow	0: 5028±283K AM: Amber	FC: Full Color
2 Control Mode	2 Control Mode 0: Without		out	3: Serial con	trol	







70 KINGSUN 71

2015 OUTDOOR LIGHTING PRODUCT CATALOGUE.indd 70-71