


# Artemis Series Projection Light


- Aluminum alloy, high corrosion resistance and weather-resistance
- Built-in chimney effect thermal management system with self-cleaning effect and reliable performance.
- Patented removable-module design for power variation.
- Mounting bracket with marker for angle adjustment.




**IP 66** Life Time 50,000hrs Working Temp -35°C - 50°C Working Humidity < 95% Power Factor > 0.95

Item No.	System Power (W)	Module Q'ty	Lumen Output 5000K (lm)	CCT	Driver Efficiency	Dimension(mm)
FL2F28010	33	1	3100	5000±300K	>91%	L229×W330×H259
FL2F28020	62	2	5800	5000±300K	>91%	L253×W330×H259
FL2F28030	93	3	8800	5000±300K	>91%	L315×W330×H259
FL2F28040	123	4	12300	5000±300K	>91%	L337×W330×H259
FL2F28050	155	5	15500	5000±300K	>91%	L439×W330×H259
FL2F28060	185	6	18500	5000±300K	>91%	L501×W330×H259
FL2F28070	216	7	21600	5000±300K	>91%	L563×W330×H259
FL2F28080	246	8	24600	5000±300K	>91%	L625×W330×H259
FL2F28090	277	9	27700	5000±300K	>91%	L687×W330×H259
FL2F28100	308	10	30800	5000±300K	>91%	L749×W330×H259

Ordering Information	FL2F <b>2803</b> <b>A2</b> <b>50</b> <b>DG</b> <b>V27</b> <b>0 0</b>				
	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>
<b>1 System Power</b>	<b>2801:</b> 33W <b>2802:</b> 62W	<b>2803:</b> 93W <b>2804:</b> 123W	<b>2805:</b> 155W <b>2806:</b> 185W	<b>2807:</b> 216W <b>2809:</b> 246W	<b>2809:</b> 277W <b>2810:</b> 308W
<b>2 Light Distribution</b>	A3		A4	S1	
<b>3 Color Temp</b>	<b>30:</b> 3000±300K		<b>40:</b> 4000±300K		<b>50:</b> 5000±300K
<b>4 Housing Color</b>	<b>MB:</b> Matt Black			<b>DG:</b> Dark Grey	
<b>5 Input Voltage</b>	<b>A22:</b> AC 220-240V		<b>V27:</b> AC 120-277V		<b>V48:</b> AC 347-480V

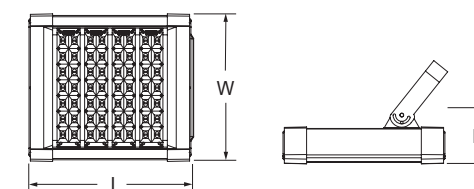


Light Distribution Curve



Luminous Intensity Unit : cd/klm  
Lens Code : S5N112  
Type V

Light Distribution Curve



Luminous Intensity Unit : cd/klm  
Lens Code : S5M111  
Type V