


Mini Apollo Series Street Light


- The Mini Apollo LED street light embraces its solid and slim style, available both in vertical module design and horizontal module design.
- A thermal and optical integrated modular system, multiple options of light distribution.
- Free tool installation and easy maintenance, various control methods, as well as a wide range of applications.

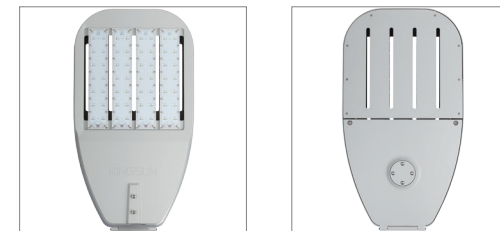


IP 66

| Item No. | System Power (W) | Module Q'ty | Lumen Output 5000K (lm) | CCT | Driver Efficiency | Dimension(mm) |
|----------|------------------|-------------|-------------------------|-----------|-------------------|----------------|
| RL2P2803 | 93 | 3 | 8800 | 5000±300K | >91% | L589×W323×H114 |
| RL2P2804 | 123 | 4 | 12300 | 5000±300K | >92% | L589×W323×H114 |

| Ordering Information | RL2P 2802 A2 50 CG A22 1 0 | | | | |
|----------------------|----------------------------|----------|------------------|-----------|----------------------------|
| | 1 | 2 | 3 | 4 | 5 |
| 1 System Power | 2803: 93W | | 2804: 123W | | |
| 2 Light Distribution | A3 | | | | |
| 3 Color Temp | 30: 3000±300K | | 40: 4000±300K | | 50: 5000±300K |
| 4 Input Voltage | A22: AC 220-240 V | | V27: AC 120-277V | | V48: AC 347-480V |
| 5 Control Mode | 0: Without | 1: Timer | 2: ZigBee | Photocell | 0-10V Dim Dali Control PLC |

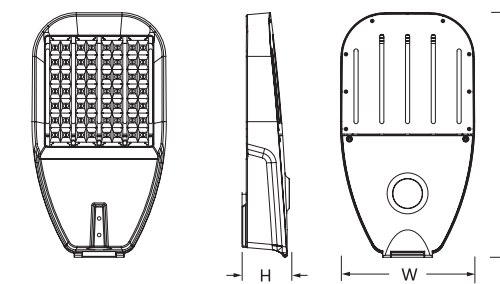

Light Distribution Curve



Luminous Intensity Unit : cd/km
Lens Code : A3L119
Type II