


Wallwash Light



WW11 Wallwash Light

- Slender shape, lighting large vertical view of the building.
- Two options for light distribution, patented wall washing and narrow beam angle.
- Anodic oxidation process.
- Higher light transmittance with toughened glass.
- The functions of the fixture change with different lens.




IP 65


Item No.	System Power (W)	#of LEDs	Light Color	Input Voltage	Lamp Dimension(mm)
WW111012	15	12	Single / FC	DC24V	L500×W77×H135
WW111018	22	18	Single / FC	DC24V	L1000×W77×H135
WW111024	30	24	Single / FC	DC24V	L1000×W77×H135
WW111036	42	36	Single / FC	DC24V	L1000×W77×H135
WW111048	55	48	Single / FC	DC24V	L1000×W77×H135

Ordering Information

	WW11	1012	S5	40	MB	D24	0	0
		1		2				3
1 System Power		1012: 15W 1018: 22W		1024: 30W 1036: 42W				1048: 55W
2 Color Temp/ Light Color		30: 3045±175K RR: Red		40: 3985±275K GG: Green BB: Blue				50: 5028±283K YY: Yellow AM: Amber FC: Full Color
3 Control Mode				0: Without				3: DMX512

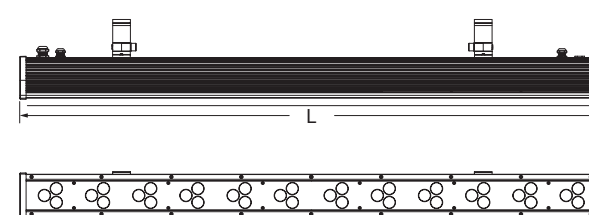


Light Distribution Curve



Luminous Intensity Unit : cd/km
Lens Code : S5020
Type V

Light Distribution Curve



Luminous Intensity Unit : cd/km
Lens Code : S7L201
Type VII

Types below are to be found in appendix

- S5014 Type V
- S5015 Type V
- S5022 Type V