


Eagle Series Street Light

- Light-weight, elegant design.
- High quality COB light engine ensures stable light output.
- Accurate light distribution enables high utilization of light.
- Low-glare, high uniformity.
- High light efficacy, long life span, maintenance-free.




IP 65


Item No.	System Power (W)	Module Q'ty	Lumen Output 5000K (lm)	CCT	Driver Efficiency	Dimension(mm)
RL2Y5002	100	4	11000	4000K	>92%	L539xW313xH94
RL2Y5003	180	6	19500	4000K	>92%	L656xW317xH94

Ordering Information

	RL2Y	5002	A2	50	DB	V27	1	1
		1	2	3	4	5	6	
1 System Power		5002: 100W						5003: 180W
2 Light Distribution			A2					
3 Color Temp			30: 3000±300K	40: 4000±300K	50: 5000±300K			
4 Housing Color		CG: Cold Grey	SG: Silver Grey	BK: Black	DB: Dark Blue			
5 Input Voltage			A22: AC 220-240 V		V27: AC 120-277V			
6 Control Mode		0: Without	1: Timer	2: ZigBee	6: Photocell	0-10V Dim	Dali Control	PLC

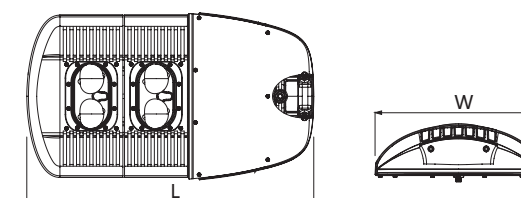

Light Distribution Curve



Luminous Intensity Unit : cd/km
Lens Code : A2M417
Type II